

Trotec safety screen operating manual


Set up

1. All our Trotec safety screens are delivered with a professional transportation bag.





2. Take out the safety screen from the bag and put it down on the ground. It is not necessary to set up the safety screen at location, as it can be carried to the desired location, even when built.

3. Put the safety screen in such a position that all the 4 frame bars and the fixing disks (A) have enough space for building up.

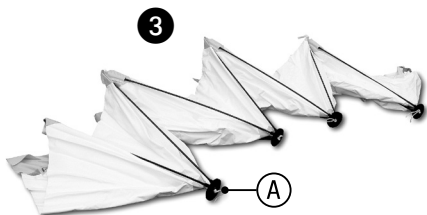


4. Take with both hands the upper frame bars (B) and erect them into a vertical position.

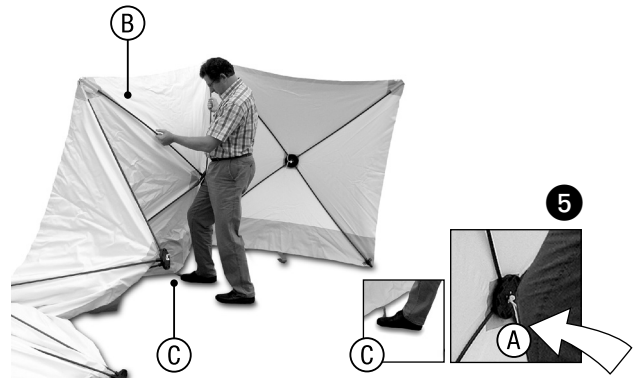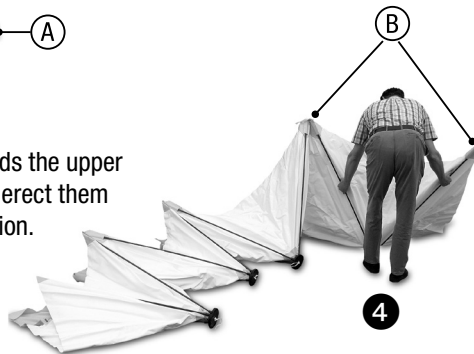


5. Firmly hold the two top frame bars with both hands (B) and stand with one foot on the red PVC strips (C) in order to stabilise the lower frame. Now press with either your leg or knee against the fixing disk towards the outside (A), so that the material comes under tension. Conclusion: The four bar ends should be stable before putting the structure under tension.

6. Now you stretch consecutively the side walls to all frame bars. The safety screen is now fully assembled and may still need to be fixed with the herring, magnets, clamping straps, telescopic rods and rope set which are available as an accessory.

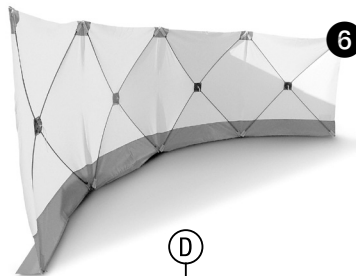

Dismantling

7. In order to dismantle, you have to hold the middle of one frame bar on the upper-side with one hand, while standing with one foot on the red strap, then you pull one of the upper bars with the other hand, in your direction.

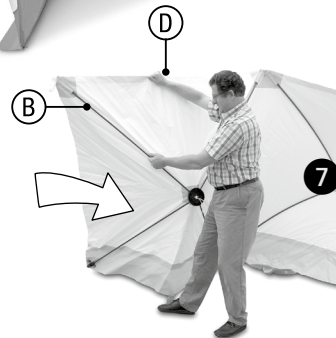

8. Please fold the 4 frame bars in such a way that all the 4 fixing disks comes together and then compromise the volume by using the white nylon strap.



Directions on the care, maintenance, storage and repair of Trotec safety screen

Care

The material consists of extremely robust polyester cloth. For cleaning, even when heavily soiled, use only clean water and no detergent or soap solutions.

Maintenance

The cloth, the fiberglass bars and the fixings are basically maintenance-free.

Storage

The wall must be completely dry for hygienic reasons and durability before packing and storing. If due to weather conditions, drying is not immediately suitable, this should as soon as possible, but no later than 12 hours, due to the risk of mildew growth.

Repair

If in operation a crack or hole in the cloth should arise, you can repair the safety screen with Trotec work tent repair kit.