


Trotec safety screen Operating manual

Set up

1. All our Trotec safety screens are delivered with a professional transportation bag.

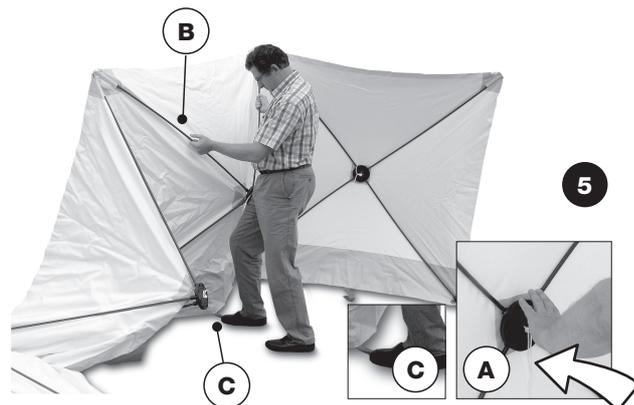


5. Then put one feet on the middle red strap (C) beneath and put with your hand tension on the hub with one hand, while holding up the upper side or use your both hands for pressing the hub on tension or push your knee on the hub while keeping up both poles upright and holding the other feet on the strap.
6. On the same way you erect each element.




2. Take out the safety screen from the bag and put it down on earth.
It is not necessary to set up the safety screen at location, because it can, even when it is build upm easily be carried to the desired location.

3. Put the safety screen in such a position that all the 4 elements and their hubs (A) have enough space for building up.

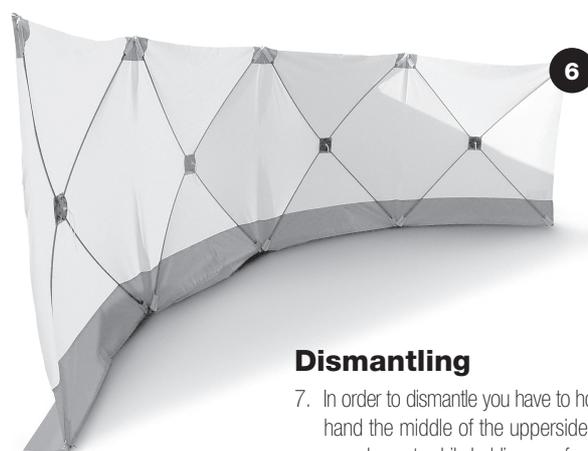


4. Take with both hands the upper tentpoles (B) and erect them into a vertical position.

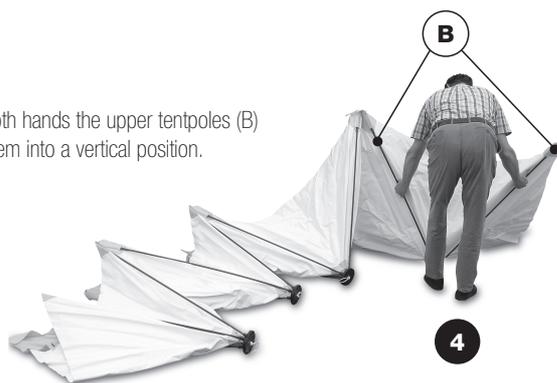

Dismantling

7. In order to dismantle you have to hold with one hand the middle of the upperside of one element, while holding one feet on the red strap, then you pull with the other hand one of the upper poles, in your direction.

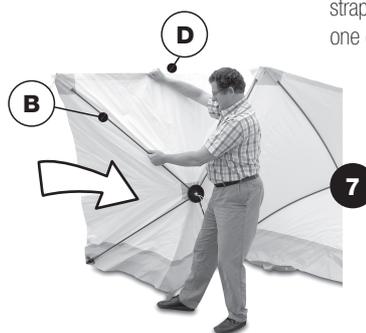

8. Please fold the 4 elements in such a way that all the 4 hubs comes together and then compromise the volume by using the white nylon strap.



Maintenance

Always use clear water for cleaning.

Storage

If the safety screen was stored under wet circumstances, then put it out of the bag within 12 hours for drying.

Repair

If one hole should arise you can order a repairset.

Warning

Never put one hand or finger between the hub and the fabric or between the hub and the poles, while putting the hub on tension. This can cause injuries.